




# HELIDECK INFORMATION PLATE

**Certificate Expiry Date: 13<sup>th</sup> September 2024**

HELIDECK Elev <b>126 ft</b>	VAR <b>0</b>	POSITION <b>N59 33.2 E001 33.8</b>	EGZT <b>Beryl SPM2</b>	
HEIGHT OF INSTALLATION: <b>146</b>		VHF <b>Traf 122.180</b>	NDB <b>Nil</b>	Issue Date <b>15 Jun 2024</b>
HIGHEST OBSTACLE WITHIN 5NM: <b>Beryl A - 390'</b>		Log <b>125.405</b>		Operating Company <b>Apache</b>
FUELLING INSTALLATION: <b>No</b>		Operating Company <b>Apache</b>		Issued By <b>Helideck Certification Agency</b>
STARTING EQUIPMENT: <b>No</b>				
HELIDECK D value: <b>22.3</b>				
P/R/H Category: <b>F</b>				
Max Weight: <b>9.3t</b>				
Circle & H Lights: <b>No</b>				

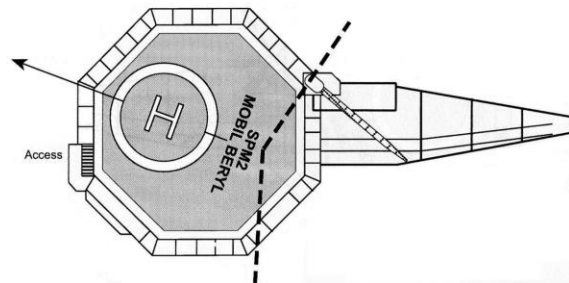

Wind (T°)	Kts	Limitation /Comment
		<b>NUI Loading Buoy</b> The supporting column is articulated beneath the sea surface, so the topside structure will roll a few degrees in a circular motion when sitting on the deck. There is no Pitch or Heave only roll <ul style="list-style-type: none"> <li>• Operations restricted to daylight only.</li> <li>• No operations when tanker attached (client requirement)</li> <li>• Table 1 (T) if overflight of access stairs opposite the boom is unavoidable</li> <li>• Approved Friction Surface - No Net</li> <li>• Cleared for S92</li> </ul>
		<b>Non-Compliance</b>
	210°	Clear.
	5:1	Access stairs opposite boom
	Misc	No Circle and H fitted No automatic fire-fighting facilities.