




HELIDECK INFORMATION PLATE

HELIDECK Elev 185 ft	VAR 1 W	POSITION N60 48.3 E001 26.9	EGFY Ninian Southern	
HEIGHT OF INSTALLATION: HIGHEST OBSTACLE WITHIN 5NM:		352 Ninian C	VHF Trf & Log 130.205	Issue Date 15 June 2022
FUELLING INSTALLATION: STARTING EQUIPMENT:		Yes Yes	Operating Company CNR (UK) Ltd	
HELIDECK D value: P/R/H Category: Max Weight: Circle & H Lights:		22.2 F 9.3t Yes	Issued By Helideck Certification Agency	

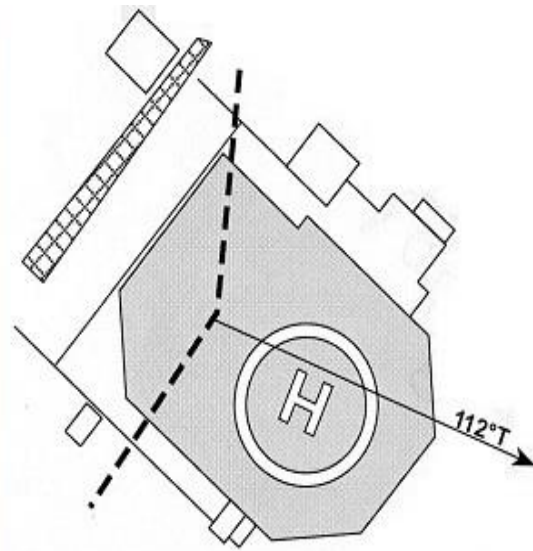

Wind (T°)	Kts	Limitation /Comment
<ul style="list-style-type: none"> • 215-275 • 215-275 • 205-285 	<ul style="list-style-type: none"> • 40-50 • 50+ 	Platform <ul style="list-style-type: none"> • Table 1(T) if overflight of 5:1 infringement unavoidable. • Table 2 (T & L) due to possible turbulence from turbine stacks. • Nil Landings. • Turbulence reports required whenever the wind is in this sector. • Approved friction surface - no net. • Cleared for S92.
		Non-Compliance
210°		Valve above east hydrant housing - approx. 400mm adl. East crane cab (when boom in rest) is marginal infringement. Handrails below east crane cab - approx. 0.5m adl. Aircraft tie downs approx. 35mm adl.
5:1		No 4 Lifeboat (SW) approx. 30m below deck level. Accommodation roof and East access stair roof.