




HELIDECK INFORMATION PLATE

HELIDECK Elev. 72 ft	VAR Check	POSITION Check	XSTP Subtech Paladin		
HEIGHT OF INSTALLATION: 97		VHF Check	NDB TPN; 410kHz	Issue Date 12 Oct 2021	
HIGHEST OBSTACLE WITHIN 5NM: Check		GO Offshore		Issued By Helideck Certification Agency	
FUELLING INSTALLATION: No					
STARTING EQUIPMENT: No					
(Norway 1.25D - 'H' = 20.9m)					
HELIDECK D value: 20.9m					
P/R/H Category: 3					
Max Weight: 12.6t					
Circle & H Lights: Yes					

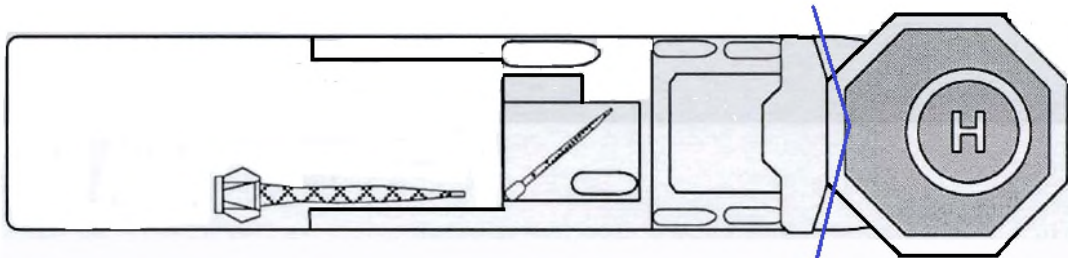

Wind (T°)	Kts	Limitation /Comment
		DSV - Bow mounted helideck • Cat 3 Bow Helideck – Day Ops only when vessel into wind Cat 2 Night Ops permitted when vessel heading downwind. (ICAO Heliport manual Doc 9261 edition 4 applies) Note: Ideally wind should be on Starboard Quarter for night Ops • TD/PM offset fwd due to obstructions in LOS • Approved Friction surface • DIFFS fitted • HMS Rev.8C fitted.
		Non Compliance
	150°	Various obstructions in 1st sector including central exhaust vent, handrails, ship's compass, and housed nav mast
	Misc.	Aiming Circle offset. Non-Compliant HMS Fitted